

#### Produkteigenschaften

Durchmesser	195 mm
Einbauöffnung	68 mm
Bohrungsdurchmesser Holz / Beton	74 mm
Maximale Deckenstärke	50 mm
Minimale Deckenstärke	10 mm
Farbe	Orange


#### XL 150 Uni-Flexx

- Frontteil für das Primo Einbaugehäuse XL 150 (P870)
- » Ermöglicht nachträglichen Einbau in Fertigteildecken
- » Ermöglicht die Installation in der Aufsparrenisolierung
- 68 mm Einbauöffnung
- » Minimaler statischer Eingriff
- » Bohrung kann ohne Fachpersonal durchgeführt werden
- Abtrennbare Installationssegmente
- » Frontteil individuell an Deckenstärke anpassbar
- » Höhere Flexibilität bei der Installation

Serie	XL-Serie
Artikelnummer	P948
Kategorie	Beton / Installation
Montageart	Schraubbefestigung
Einsatz	Filigrandecke / Sichtdachstuhl
EAN	4260182066133

#### Materialeigenschaften

Material	PP
----------	----

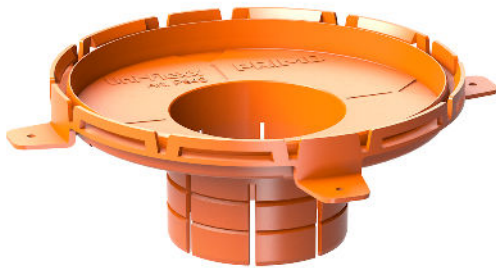

**Product features**

Diameter	195 mm
Installation opening	68 mm
Drilling diameter wood / concrete	74 mm
Maximum ceiling thickness	50 mm
Minimal ceiling thickness	10 mm
Colour	Orange

**XL 150 Uni-Flexx**

- Front part for Primo installation housing XL 150 (P870)
- » Enables retroactive installation in prefabricated ceilings
- » Enables installation in above-rafter insulation
- 68 mm installation opening
- » Minimal static interference
- » Drilling can be done without specialist personnel
- Removable installation segments
- » Front part individually adjustable to ceiling thickness
- » High Flexibility regarding installation

Series	XL-Series
Article No.	P948
Category	Concrete / Installation
Type of installation	Screws
Use	Prefabricated ceilings / exposed roof beams
EAN	4260182066133

**Material properties**

Material	PP
----------	----